**Ordering Information**

Catalog No.	Diameter	Depth	Finish	Voltage/Ballast	Lamps
5002	12 7/8"	7 3/8"	Matte White	N/A	(2) A19 60W max.
5003WH218U			Matte White	120V / 277V Electronic	(2) 18W Quad Tube 4-Pin

Features

- 1. Diffuser:** Blown white opal glass.
- 2. Bracket:** Twist-lock fastening system, no tools required.
- 3. Mounting Pan:** .050" min. thickness. Aluminum.
- 4. Lamps:** Compact Fluorescent or Incandescent. (by others)
- 5. Keyhole Mounting Slots:** For direct mounting to 4" octagonal outlet box.

Lamping**Incandescent:** A19 60W max. (2)**Compact Fluorescent:** 18W Quad tube (2)

	General Electric	Osram/Sylvania	Phillips
4-pin	F18 DBX/SPX*/4P	CF18DD/E/*	PL-C18W/*

*Manufacturers' color temperature designation.

Electrical**Lampholders:****Incandescent:** Medium base, porcelain, nickel-plate screw shell.**Compact Fluorescent:** 4-pin, G24q-2 base



Electronic		
Ballast:	120V	277V
Total Input Watts	42	42
Max. Line Current (amps)	.35	.15
Power Factor	>.98	>.98
Ballast Factor	1.05	1.05
THD	<10%	<10%
Min. Starting Temps.	-20° C (-4°F)	-20° C (-4°F)

Labels


UL Listed, suitable for Damp Locations.

Job Information**Type:****Job Name:****Cat. No.:****Lamp(s):****Notes:**

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

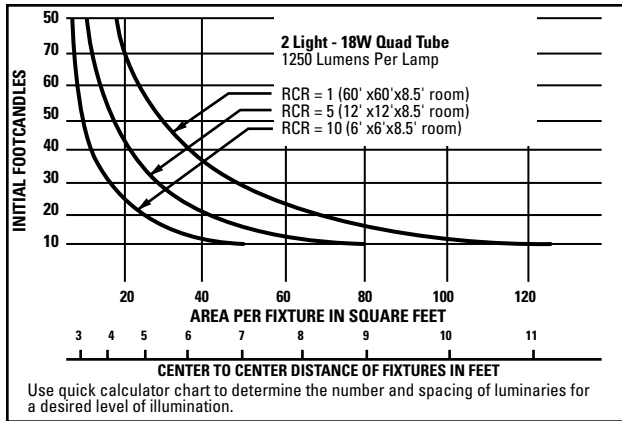

SPACING RATIO = 1.3

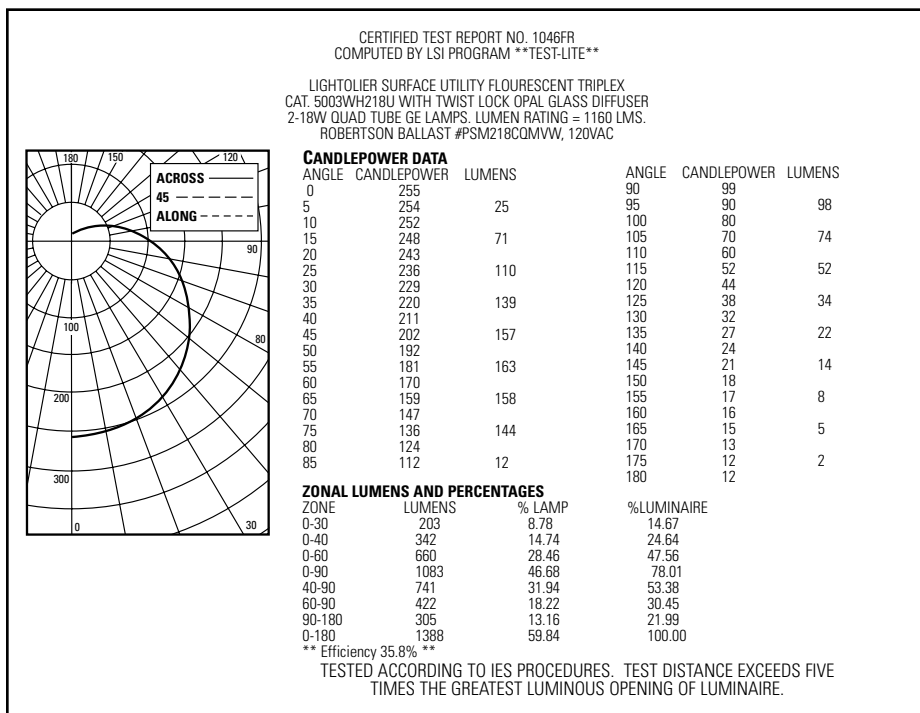

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD												
%EFFECTIVE FLOOR CAVITY REFLECTANCE = .20												
ROOM CAVITY RATIO	80			70			50			30		
	50	30	10	50	30	10	50	30	10	50	30	10
1	.57	.54	.51	.54	.51	.48	.49	.47	.45	.44	.43	.41
2	.49	.44	.40	.46	.42	.38	.42	.38	.35	.38	.35	.33
3	.42	.37	.32	.40	.35	.31	.36	.32	.29	.33	.30	.27
4	.37	.32	.27	.35	.30	.26	.32	.28	.25	.29	.26	.23
5	.33	.27	.23	.31	.26	.22	.29	.24	.21	.26	.22	.19
6	.29	.24	.20	.28	.23	.19	.25	.21	.18	.23	.19	.17
7	.26	.21	.17	.25	.20	.16	.23	.18	.15	.21	.17	.14
8	.23	.18	.15	.22	.18	.14	.21	.16	.13	.19	.15	.12
9	.21	.16	.13	.20	.16	.12	.19	.15	.12	.17	.14	.11
10	.19	.14	.11	.19	.14	.11	.17	.13	.10	.16	.12	.10

DETERMINED IN ACCORDANCE WITH CURRENT IES PUBLISHED PROCEDURES

Job Information**Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®